



## INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification <sup>7</sup> :

G10L 21/02

A1

(11) International Publication Number:

WO 00/38180

(43) International Publication Date:

29 June 2000 (29.06.00)

(21) International Application Number: PCT/SE99/02258

(22) International Filing Date: 3 December 1999 (03.12.99)

(30) Priority Data:

09/215,355

18 December 1998 (18.12.98)

US

(71) Applicant: TELEFONAKTIEBOLAGET LM ERICSSON  
(publ) [SE/SE]; S-126 25 Stockholm (SE).(72) Inventors: CAVANDER, Hans; Aspvägen 6, S-245 44  
Staffanstorps (SE). LJUNGBERG, Per; Råbygatan 17B,  
S-223 61 Lund (SE).(74) Agent: ERICSSON MOBILE COMMUNICATIONS AB; IPR  
Department, S-221 83 Lund (SE).

(81) Designated States: AE, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CR, CU, CZ, DE, DK, DM, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, TZ, UA, UG, UZ, VN, YU, ZA, ZW, ARIPO patent (GH, GM, KE, LS, MW, SD, SL, SZ, TZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).


Published

With international search report.

(54) Title: NOISE SUPPRESSION IN A MOBILE COMMUNICATIONS SYSTEM

## (57) Abstract

A method and apparatus are disclosed for suppressing bumblebee noise in a mobile communications system, whereby a digital processor (18) associated with a speech coder (17) in a mobile phone (16) receives the incoming stream of speech samples and performs a Fast Fourier Transform on the incoming sample stream. A priori knowledge about where in the frequency spectrum the bumblebee noise occurs is advantageously used to determine just which frequency samples in the Fast Fourier Transform the bumblebee noise has enhanced. The noise at these frequencies is then suppressed (110) by, for example, interpolating between two neighboring frequency samples to suppress the noise in the samples therebetween.

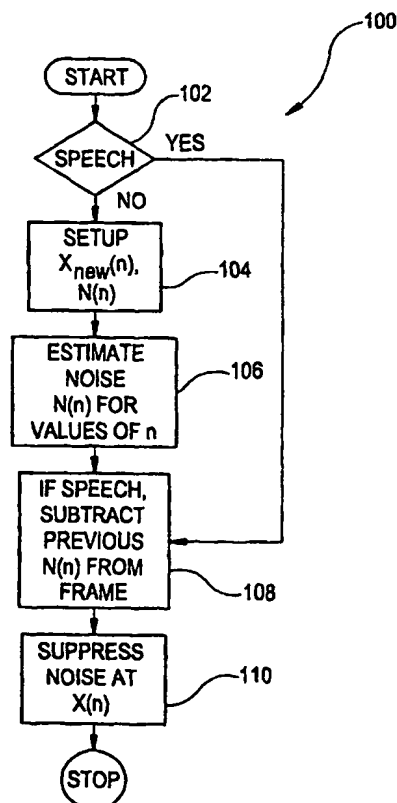

**FOR THE PURPOSES OF INFORMATION ONLY**

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece	ML	Mali	TR	Turkey
BG	Bulgaria	HU	Hungary	MN	Mongolia	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MR	Mauritania	UA	Ukraine
BR	Brazil	IL	Israel	MW	Malawi	UG	Uganda
BY	Belarus	IS	Iceland	MX	Mexico	US	United States of America
CA	Canada	IT	Italy	NE	Niger	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NL	Netherlands	VN	Viet Nam
CG	Congo	KE	Kenya	NO	Norway	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NZ	New Zealand	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	PL	Poland		
CM	Cameroon	KR	Republic of Korea	PT	Portugal		
CN	China	KZ	Kazakstan	RO	Romania		
CU	Cuba	LC	Saint Lucia	RU	Russian Federation		
CZ	Czech Republic	LI	Liechtenstein	SD	Sudan		
DE	Germany	LK	Sri Lanka	SE	Sweden		
DK	Denmark	LR	Liberia	SG	Singapore		
EE	Estonia						

**NOISE SUPPRESSION  
IN A MOBILE  
COMMUNICATIONS SYSTEM**

5 BACKGROUND OF THE INVENTION

Technical Field of the Invention

The present invention relates in general to the cellular telephony field and, in particular, to a method and apparatus for suppressing the effects of noise in digital mobile communications systems.

10 Description of Related Art

The so-called "bumblebee" sound associated with certain mobile phones is noise generated by the switching nature of Time Division Multiple Access (TDMA) cellular telephony. For example, in the Global System for Mobile Communications (GSM), the TDMA radio circuits are switched on and off at a rate of approximately 217 Hz. Signals at this base frequency and its harmonic frequencies are coupled into the analog microphone signal in the mobile phone, which produces the annoying bumblebee noise in the speech signal on the uplink.

In existing radiotelephone or cellular systems, this bumblebee noise is suppressed using various analog noise suppression techniques. For example, bumblebee noise can be suppressed by electrically decoupling certain radio circuits, or by using certain microphones designed to minimize the noise. Also, certain digital techniques (e.g., digital noise canceller) could be used to suppress bumblebee noise. However, at present, these conventional devices and approaches would function minimally at best, because they estimate the noise without making use of prior knowledge of the disturbing frequencies. As such, the above-described conventional approaches and devices for suppressing bumblebee noise are time-consuming, require costly components, and they are exceptionally difficult to implement. These approaches and devices can also require the use of non-optimal system settings such as, for example, compensating offsets in microphone gain.

30 An analysis of a Fourier expansion of a disturbing periodic signal that

-2-

creates bumblebee noise illustrates that the frequency components of this signal decay at the rate of  $1/\text{frequency}$ , which is a relatively slow rate. Consequently, it is not effective to filter out only the first few frequency components of the disturbing signal, because there are approximately 15 frequency components that have to be suppressed in the frequency band below 4 kHz. Therefore, if a conventional notch filter design were to be considered for bumblebee noise suppression, the computational complexity of employing 15 notch filters would serve as a significant deterrent at best. However, as described in detail below, the present invention successfully resolves these and other related noise suppression problems.

## 10 SUMMARY OF THE INVENTION

In accordance with a preferred embodiment of the present invention, a method and apparatus for suppressing bumblebee noise in a cellular system are provided, whereby a digital processor associated with a speech coder in a mobile phone receives the incoming stream of speech samples and performs a Fast Fourier Transform (FFT) on the incoming sample stream. A priori knowledge about where in the frequency spectrum the bumblebee noise occurs is advantageously used to determine just which frequency samples in the FFT the bumblebee noise has enhanced. The noise at these frequencies is then suppressed by, for example, interpolating between two neighboring frequency samples to suppress the noise in the samples therebetween.

20 An important technical advantage of the present invention is that bumblebee noise in mobile communications systems can be suppressed at the expense of only a slight increase in current consumption in a digital signal processor (DSP), but at no additional cost for components, etc.

25 Another important technical advantage of the present invention is that it provides an approach for suppressing bumblebee noise in mobile communications systems that can supplement conventional approaches or devices being used.

## BRIEF DESCRIPTION OF THE DRAWINGS

A more complete understanding of the method and apparatus of the present

-3-

invention may be had by reference to the following detailed description when taken in conjunction with the accompanying drawings wherein:

FIGURE 1 is a block diagram of an exemplary mobile radiotelephone which can be used to implement a preferred embodiment of the present invention;

5       FIGURE 2 is an exemplary diagram of a noise signal in the frequency plane, which is infected with a periodic disturbance at known frequencies; and

FIGURE 3 is a flow diagram of an exemplary algorithm or method that can be used to implement the preferred embodiment of the present invention.

#### DETAILED DESCRIPTION OF THE DRAWINGS

10       The preferred embodiment of the present invention and its advantages are best understood by referring to FIGURES 1-3 of the drawings, like numerals being used for like and corresponding parts of the various drawings.

Essentially, in accordance with a preferred embodiment of the present invention, a method and apparatus for suppressing bumblebee noise in a cellular system are provided, whereby a digital processor associated with a speech coder in a mobile phone receives the incoming stream of speech samples and performs an FFT on the incoming sample stream. A priori knowledge about where in the frequency spectrum the bumblebee noise occurs is advantageously used to determine just which frequency samples in the FFT the bumblebee noise has enhanced. The noise at these frequencies is then suppressed by, for example, interpolating between two neighboring frequency samples to suppress the noise in the samples therebetween.

Specifically, FIGURE 1 is a block diagram of an exemplary mobile radiotelephone 10, which can be used to implement a preferred embodiment of the present invention. For this exemplary embodiment, the radiotelephone 10 shown in FIGURE 1 is preferably a mobile phone (e.g., mobile station, mobile terminal, etc.) for use in a digital TDMA cellular communications system, such as, for example, the GSM in Europe, the Personal Digital Cellular (PDC) System in Japan, or the Digital-Advanced Mobile Phone System (D-AMPS) in North America. However, the present invention is not intended to be limited to any particular system, but can be applied in any type of communications system where suppression of bumblebee noise or similar

-4-

types of noise are at issue.

As shown, the mobile phone 10 includes a transmitting part and receiving part. For this embodiment, the present invention is preferably implemented in the transmitting part of the mobile phone. Consequently, the following description is directed to the transmitting part of the phone. As such, an analog speech signal from the microphone 12 is digitized by an analog-to-digital (A/D) converter 14. A segmentation unit 16 divides the digitized speech signal into 20 ms segments, which are coupled to the speech coder 17. A function of the speech coder 17 is to reduce the bit rate of the digitized speech signals, in order for the resulting speech channels to be able to stay within the allowed frequency band. The bit rates shown are per physical channel.

For the preferred embodiment, a Digital Signal Processor (DSP) or similar type of digital processor 18 is associated with the speech coder 17 to receive the incoming stream of speech samples (e.g., sampled by the coder at 8 kHz). The processor 18 performs an FFT on the incoming sample stream. An exemplary algorithm that can be used to perform such an FFT is described in more detail below. For this embodiment, an FFT block length of, for example,  $N=256$  can be assumed. For this particular block length ( $N$ ), the separation or distance between speech samples in the frequency domain is approximately 30 Hz. In accordance with the present invention, a priori knowledge about where in the frequency spectrum the bumblebee noise occurs is advantageously used to determine just which frequency samples in the FFT the bumblebee noise has enhanced. For example, the bumblebee noise is enhanced at frequency multiples of 217 Hz =  $1/4.615$  ms (the access rate in the GSM). The noise at these frequencies is then suppressed (e.g., by interpolating between two neighboring frequency samples to suppress the noise in the samples therebetween). An exemplary algorithm that can be used for suppressing the bumblebee noise at these frequencies is described below. The processor 18 can then perform an Inverse FFT (IFFT) to transform the noise-suppressed speech signals back to the time domain. The speech signals are then channel coded (19), interleaved, encoded and burst formatted (20), modulated (22) and transmitted from the phone 10 over the uplink channel(s).

More precisely, if the processor 18 uses a 256-point FFT for example, then 256

-5-

frequency components that are affected by the periodic disturbing noise signal are known. FIGURE 2 is an exemplary diagram of a noise signal in the frequency plane, which shows the noise signal "infected" with a periodic disturbance at known frequencies. Note, however, that the diagram in FIGURE 2 is provided for illustrative purposes only and is not based on actual data. The signal shown comprises a typical noise signal and a periodic disturbance. For simplicity, only the points 1-127 are shown in FIGURE 2, because the points 128-256 are no more than a mirror image of the points 1-127. As such, with an exemplary sampling rate of 8 kHz, the frequency separation between the points in the FFT (as shown in FIGURE 2) is  $8000/256 = 31.25$  Hz.

Given the above-described conditions, it is known that the disturbance frequencies will occur in the FFT frequency bins  $n \cdot 217/31.25$ , where  $n=1,2,3,...etc.$  Consequently, as illustrated by FIGURE 2, the FFT frequency bins for this example are at 7, 14, 21,..., etc. Also, as illustrated by FIGURE 2, according to the Fourier expansion of the periodic signal, the power of the harmonics will decay at a certain rate.

FIGURE 3 is a flow diagram of an exemplary algorithm or method 100 that can be used to implement the preferred embodiment of the present invention. First, let "X(n)" represent an FFT of an input speech signal to the DSP or digital processor 18, and "N(n)" represent a noise estimate. At step 102 of the method shown in FIGURE 3, the processor 18 determines whether the frame of samples contains only noise (i.e., no speech signal). A reason for this condition is that the verbalized speech (vowels) contains frequency components that can be interpreted improperly as bumblebee noise. A conventional speech coder may be used to provide a voice or speech detection algorithm, in order to ensure that only noise is present when the FFT is performed.

If at step 102, the incoming frame of samples contains a speech signal, the processor 18 does not update the noise estimate in accordance with the subsequent steps. Otherwise, at step 104, the processor 18 sets up the following expressions,  $X_{new}(n) = (X(n-1) + X(n+1))/2$ , and  $N(n) = X(n) - X_{new}(n)$ , for the frequency components described earlier (e.g., where  $n = 7, 14, 21,..., etc.$ ). In other words, for this

-6-

embodiment, the processor 18 can use interpolation to form a new value for the noise's spectral component from two adjacent frequency bins (e.g.,  $X_{\text{new}}(7) = (X(8) + X(6))/2$ ). At step 106, the processor 18 estimates the noise  $N(n)$  as  $N(7) = X(7) - X_{\text{new}}(7)$ , and repeats this estimation for the noise frequencies involved (e.g.,  $n = \dots 14, 21, \dots$ , etc.).

5 Returning to step 102, if speech is contained in a frame being processed, at step 108, the processor 18 subtracts the previous noise estimate from that speech frame (e.g.,  $X_{\text{new}}(n) = X(n) - N(n)$ , for  $n = 7, 14, 21, \dots$ , etc.). As such, in accordance with the present invention, the discrete values for  $X(n)$  provided by the above-described method represent the frequency locations where the bumblebee noise can be and is effectively  
10 suppressed (step 110).

Although a preferred embodiment of the method and apparatus of the present invention has been illustrated in the accompanying Drawings and described in the foregoing Detailed Description, it will be understood that the invention is not limited to the embodiment disclosed, but is capable of numerous rearrangements,  
15 modifications and substitutions without departing from the spirit of the invention as set forth and defined by the following claims.



-7-

## WHAT IS CLAIMED IS:

1. A method for suppressing noise in a mobile radiotelephone, comprising the steps of:

receiving a plurality of signal samples from a microphone;

performing a Fast Fourier Transform on said plurality of signal samples;

determining a plurality of frequency locations associated with said Fast Fourier Transform where said noise occurs; and

suppressing said noise at one or more of said plurality of frequency locations.

2. The method of Claim 1, wherein the suppressing step comprises interpolating between a plurality of frequencies adjacent to said one or more of said plurality of frequency locations.

3. The method of Claim 1, wherein said mobile radiotelephone comprises a digital mobile radiotelephone.

4. The method of Claim 1, wherein said mobile radiotelephone comprises a GSM mobile phone.

5. A method for suppressing noise in a mobile communications system, comprising the steps of:

determining whether an incoming set of samples from a microphone contains no speech signal;

if so, performing a Fast Fourier Transform on said incoming set of samples by deriving a first expression  $X_{\text{new}}(n) = (X(n-1) + X(n+1))/2$  and a second expression  $N(n) = X(n) - X_{\text{new}}(n)$ , for  $n$  multiplied by a system access rate and divided by a sampling rate further divided by a plurality of points associated with said Fast Fourier Transform,  $n$  being set equal to a predetermined series of numbers;

estimating a noise signal  $N(n)$  for each of a plurality of noise frequencies associated with said plurality of points; and

suppressing said noise at one or more of said plurality of points.

-8-

6. A mobile telephone, comprising:  
a converter for converting a plurality of analog signals from a microphone to  
a set of digitized signal samples; and  
a digital processor coupled to said converter, said digital processor operable  
5 to:  
perform a Fast Fourier Transform on said plurality of digitized signal samples;  
determine a plurality of frequency locations associated with said Fast Fourier  
Transform noise occurs; and  
suppress said noise at one or more of said plurality of frequency locations.

10 7. The mobile telephone of Claim 6, wherein the digital processor is  
operable to suppress said noise by interpolating between a plurality of frequencies  
adjacent to said one or more of said plurality of frequency locations.

8. The mobile telephone of Claim 6, which comprises a digital mobile  
radiotelephone.

15 9. The mobile telephone of Claim 6, which comprises a GSM mobile  
phone.

FIG. 1

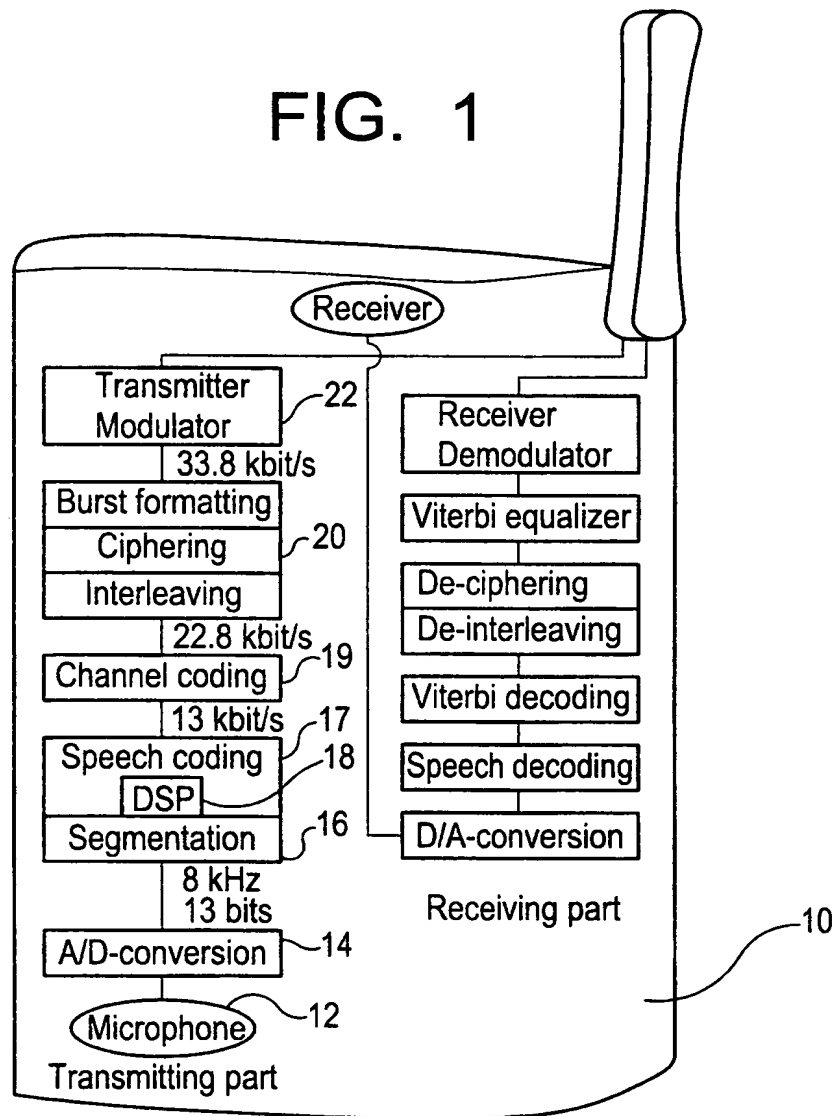


FIG. 2


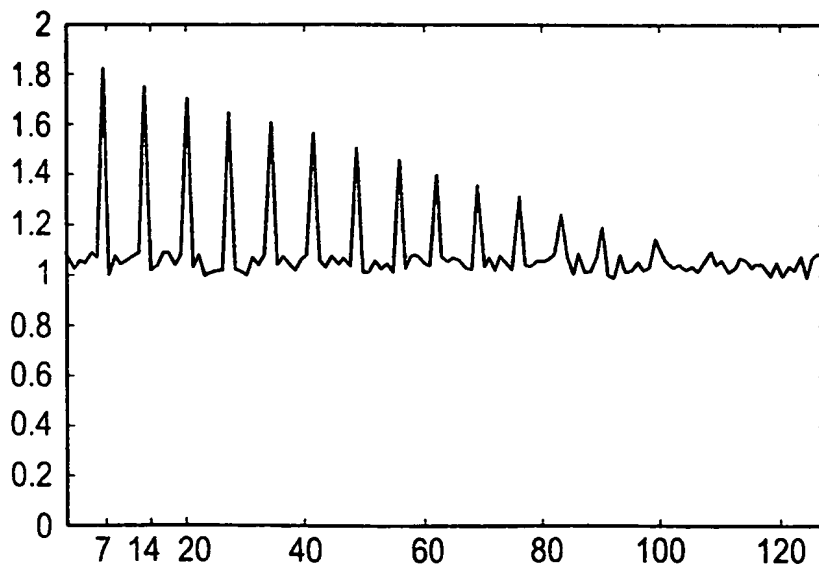


FIG. 3

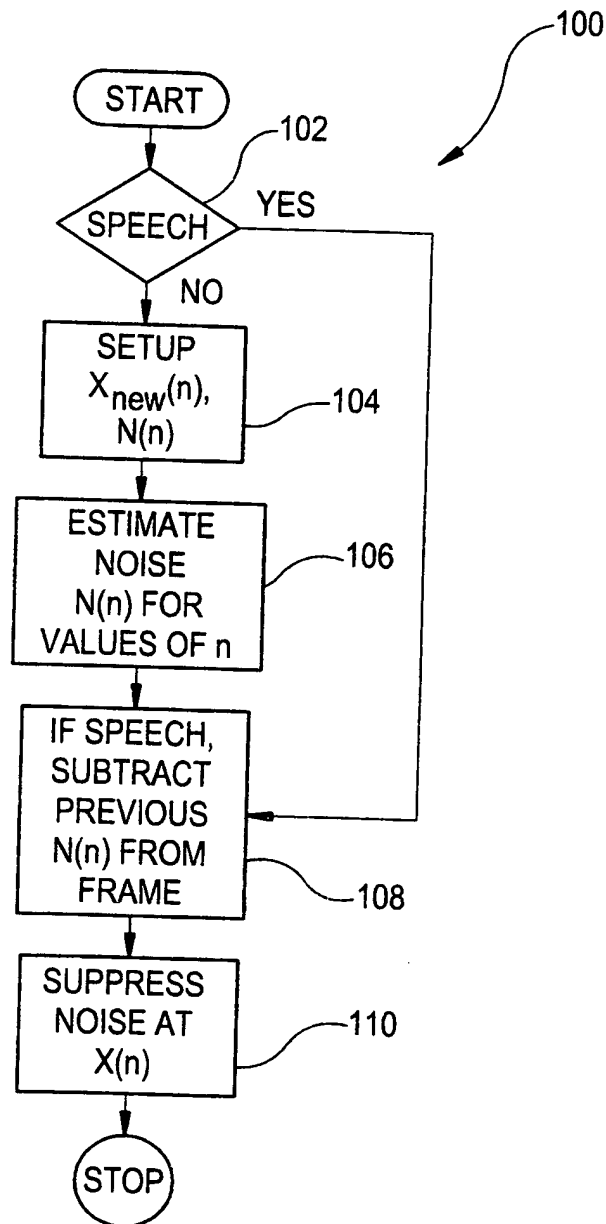

## INTERNATIONAL SEARCH REPORT

Inte. national Application No

PCT/SE 99/02258

## A. CLASSIFICATION OF SUBJECT MATTER

IPC 7 G10L21/02

According to International Patent Classification (IPC) or to both national classification and IPC

## B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 G10L H04B

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

## C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	HIKAWA H ET AL: "INTERFERENCE CANCELLATION WITH INTERPOLATED FFT" IEICE TRANSACTIONS ON FUNDAMENTALS OF ELECTRONICS, COMMUNICATIONS AND COMPUTER SCIENCES, vol. E79-A, no. 3, 1 March 1996 (1996-03-01), pages 395-401, XP000594740 * Section 3 (pages 396-398) *	1-4, 6-9
A	— — / —	5

☒ Further documents are listed in the continuation of box C.☒ Patent family members are listed in annex.

## \* Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier document but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

"Z" document member of the same patent family

Date of the actual completion of the international search

24 March 2000

Date of mailing of the international search report

31/03/2000

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2  
NL - 2280 HV Rijswijk  
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,  
Fax: (+31-70) 340-3018

Authorized officer

Ramos Sánchez, U

# INTERNATIONAL SEARCH REPORT

International Application No

PCT/SE 99/02258

## C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
------------	--	-----------------------

X	WO 96 24128 A (ERICSSON TELEFON AB L M ;HAENDEL PETER (SE)) 8 August 1996 (1996-08-08) figures 1,7 page 1, paragraph 1 page 4 -page 5 * reference to mobile telephony in page 14 *	1,3,4,6, 8,9
A	WO 97 34290 A (ERICSSON GE MOBILE INC) 18 September 1997 (1997-09-18) abstract; figure 1	1-9
A	WO 98 05031 A (ALKU PAAVO) 5 February 1998 (1998-02-05) abstract	1-9

# INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/SE 99/02258

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
W0 9624128 A	08-08-1996	SE 505156 C	07-07-1997
		AU 696152 B	03-09-1998
		AU 4636996 A	21-08-1996
		BR 9606860 A	25-11-1997
		CA 2210490 A	08-08-1996
		EP 0807305 A	19-11-1997
		FI 973142 A	30-09-1997
		JP 10513273 T	15-12-1998
		SE 9500321 A	31-07-1996
		US 5943429 A	24-08-1999
W0 9734290 A	18-09-1997	US 5903819 A	11-05-1999
		AU 710617 B	23-09-1999
		AU 2208997 A	01-10-1997
		BR 9707981 A	27-07-1999
		EP 0886852 A	30-12-1998
W0 9805031 A	05-02-1998	FI 962965 A	26-01-1998
		AU 3544597 A	20-02-1998

**This Page Blank (uspto)**